
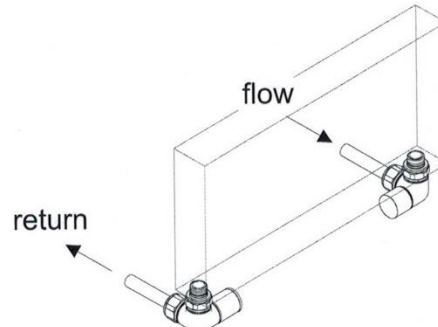
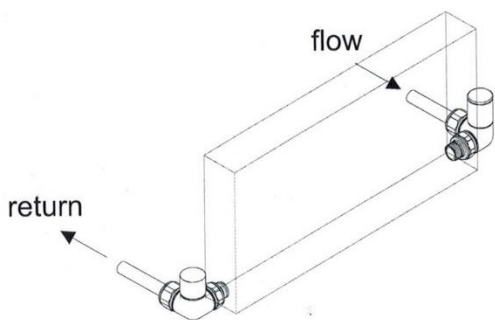
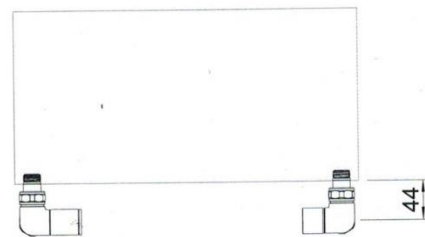
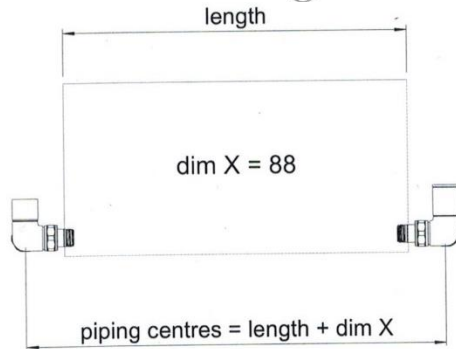
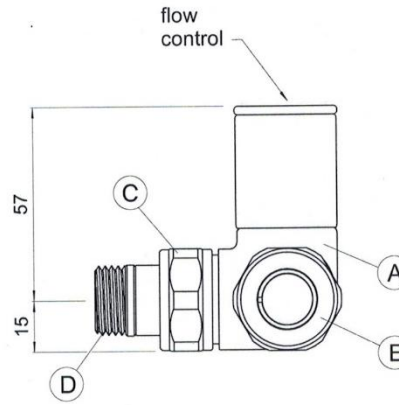
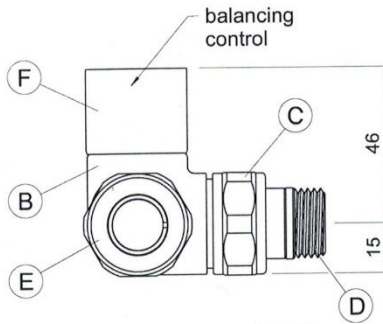
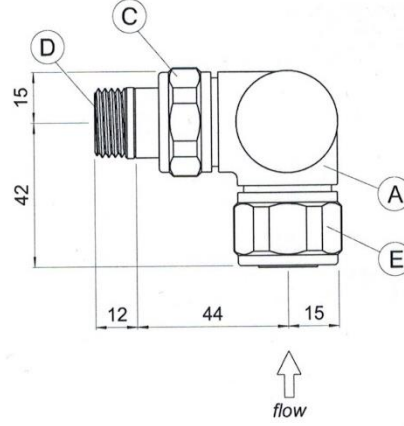


### HEATING SOLUTIONS

#### Tools & Material Required

- Allen key - 12mm
- Spanner - 29mm
- Adjustable Spanner

Key	Component	Qty
A	Manual Body (flow)	1
B	Manual Body (return)	1
C	Nut	2
D	Valve Tail (1/2" BSP)	2
E	Compression Fitting (15mm)	2
F	Balancing Cap	1

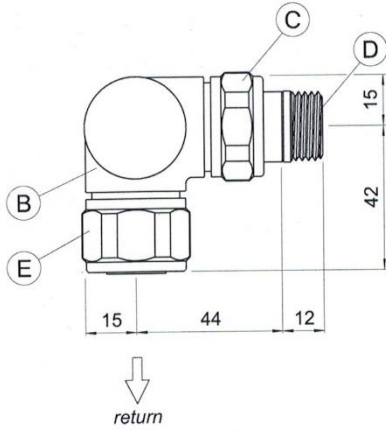

### **Assembly Instructions**

Fit valve tails (D) to radiator using 12mm Allen key, ensuring nut (C) is in place.

*Note: over-tightening of valve tails may cause damage to surface finish of radiator connections.  
Do not use grips.*

Loosen compression fittings (E) and apply valve bodies (A) & (B) to 15mm pipe tails.

Install radiator onto bracket mountings and tighten valve tails (D) onto valve bodies (A) & (B).

Tighten compression fittings (E).

After filling and venting radiator, remove balancing cap (F) and adjust balancing control to balance radiator.

*Note: connections can be reversed*